



(19)

16

Generated Document.

(11) Publication number:

PATENT ABSTRACTS OF JAPAN(21) Application number: **04061537**(51) Int'l. Cl.: **G06F 3/00 G06F 1/18**(22) Application date: **17.02.92**

(30) Priority:

(43) Date of application
publication: **10.09.93**(84) Designated contracting
states:(71) Applicant: **NEC CORP**(72) Inventor: **MORISHITA KATSUY**


(74) Representative:

**(54) HOT-LINE
INSERTION/EXTRACTION
SYSTEM**

(57) Abstract:

PURPOSE: To insert/extract a board with minimum burden for a system when the exchange of the board is required in the information processing system.

CONSTITUTION: The board 7 can be extracted by providing means (8 and 9) supplying power source independent for respective boards and cutting the power source of the board concerned after a switch device 8 logically detaches the board. Then the board 7 can be inserted by means 2, 4 and 5 which logically connect the power source of the board after the switch device 8 supplies power source. Thus, the board 7 can be inserted/extracted with minimum burden to the system.

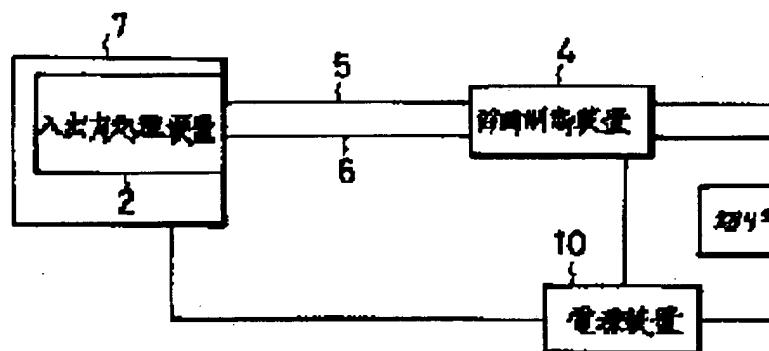

COPYRIGHT: (C)1993,JPO&Japio

